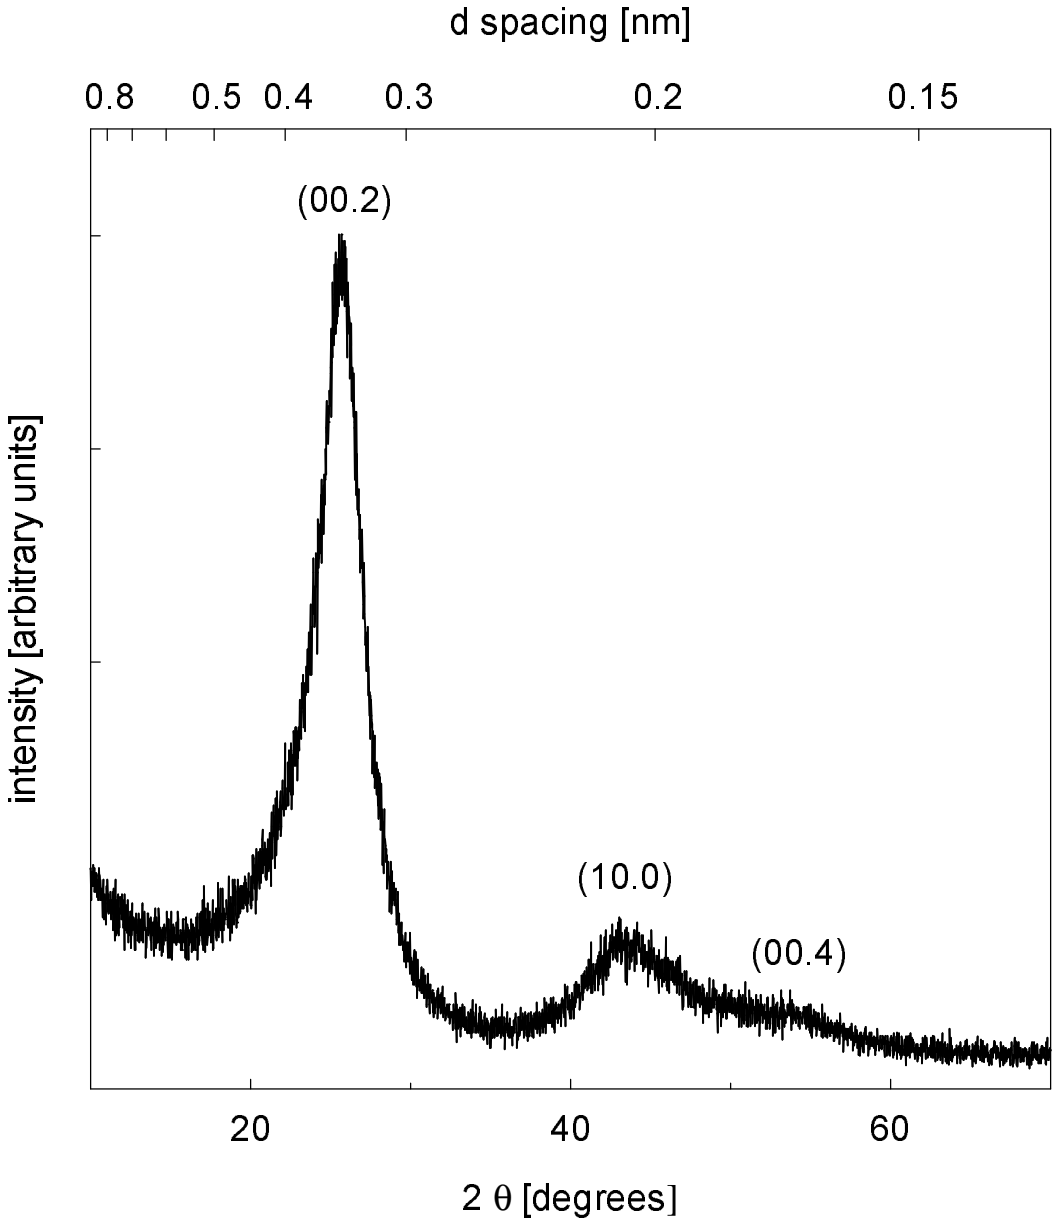
d spacing [nm]
0.8
0.5
0.4
0.3
0.2
0.15
(00.2)
(10.0)
(00.4)
intensity [arbitrary units]
20
40
60
2 θ [degrees]

This figure "Fig-2a.jpg" is available in "jpg" format from:
http://arXiv.org/ps/cond-mat/0205329v2

This figure "Fig-2b.jpg" is available in "jpg" format from:
http://arXiv.org/ps/cond-mat/0205329v2

This figure "Fig3.jpg" is available in "jpg" format from:

http://arXiv.org/ps/cond-mat/0205329v2

This figure "Fig4.jpg" is available in "jpg" format from:

http://arXiv.org/ps/cond-mat/0205329v2

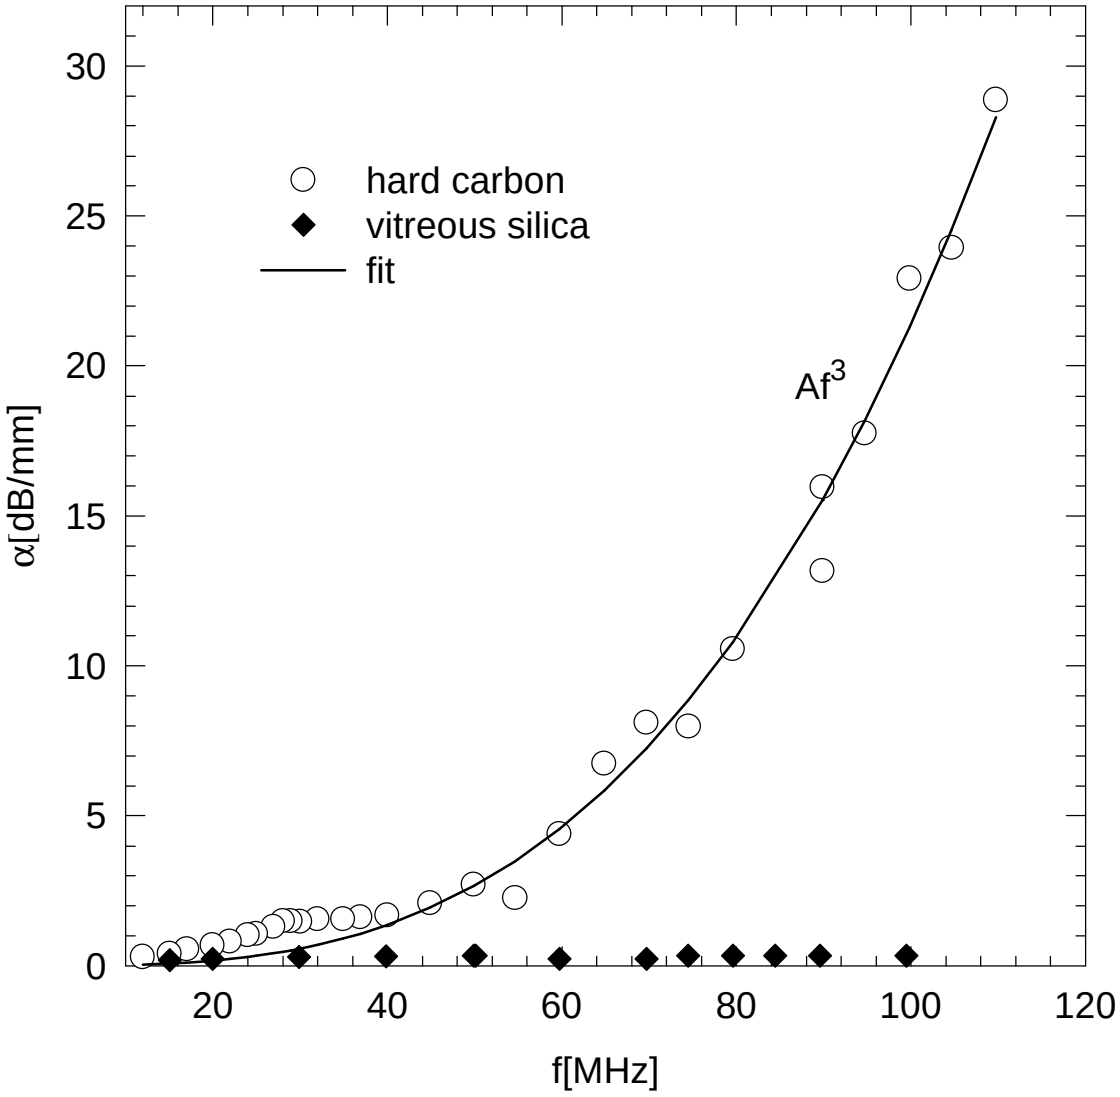
30
25
20
15
10
5
0
20
40
60
80
100
120
α[dB/mm]
f[MHz]
hard carbon
vitreous silica
fit
Af3

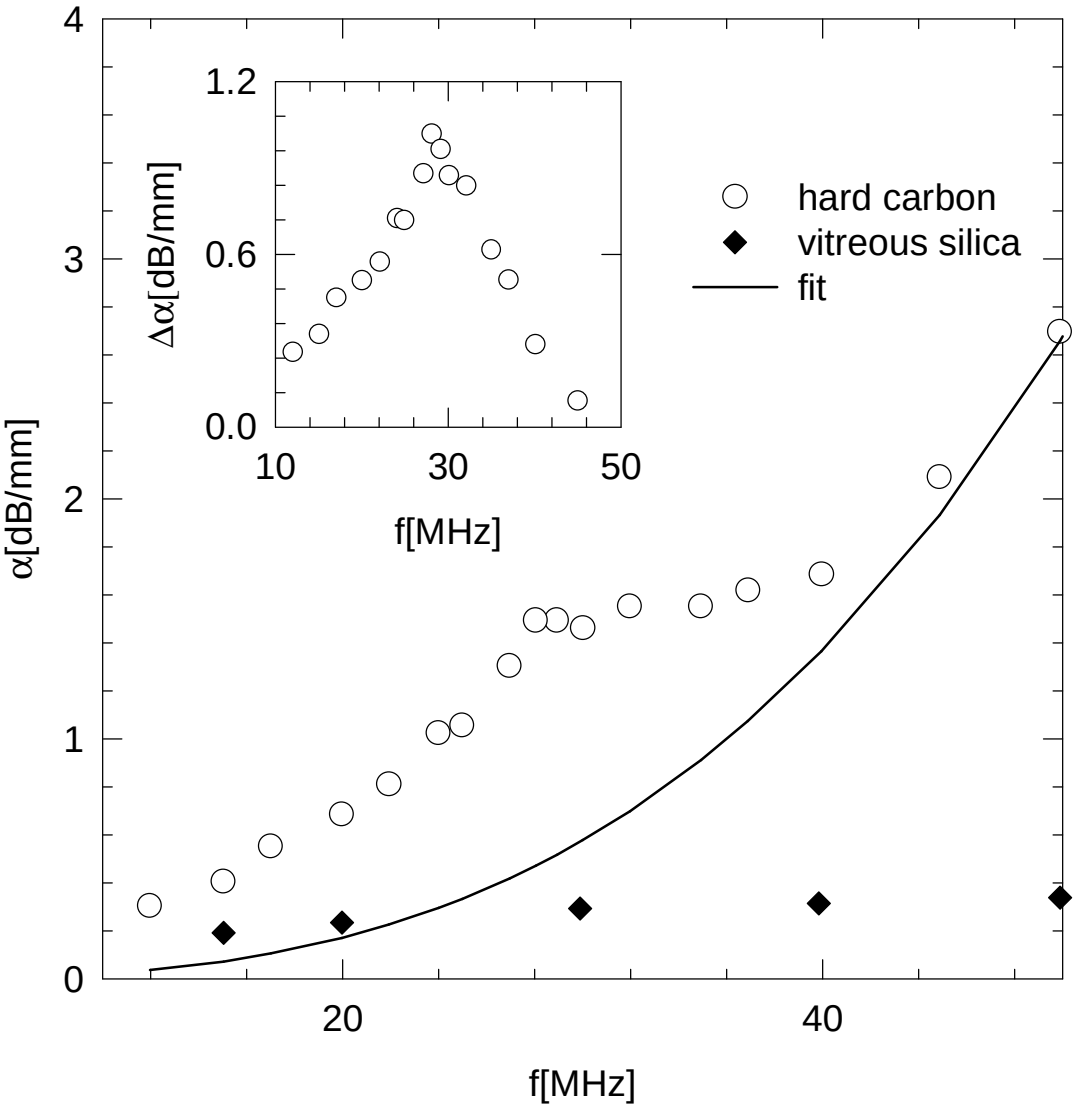
4
3
2
1
0
α[dB/mm]
20
40
f[MHz]
hard carbon
vitreous silica
fit
1.2
0.6
0.0
Δα[dB/mm]
10
30
50
f[MHz]

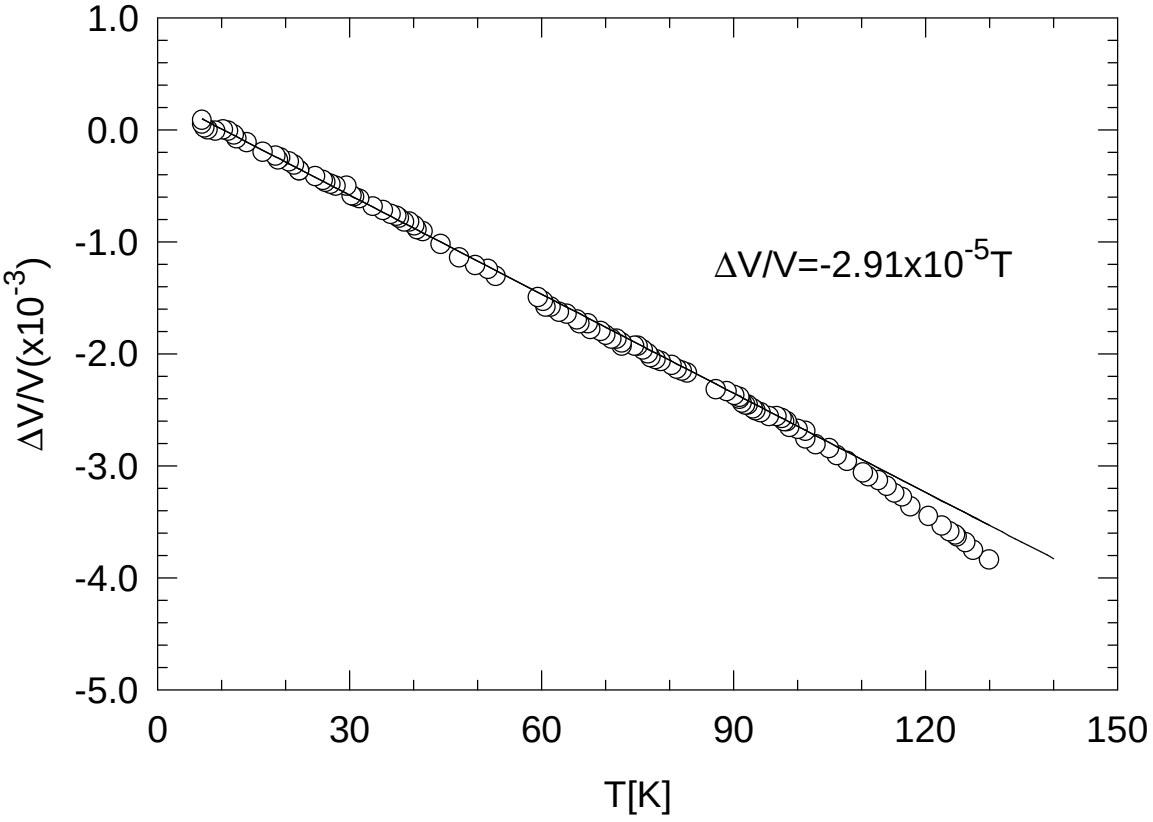
1.0
0.0
-1.0
-2.0
-3.0
-4.0
-5.0
0
30
60
90
120
150
ΔV/V(x10-3)
T[K]
ΔV/V=-2.91x10-5T

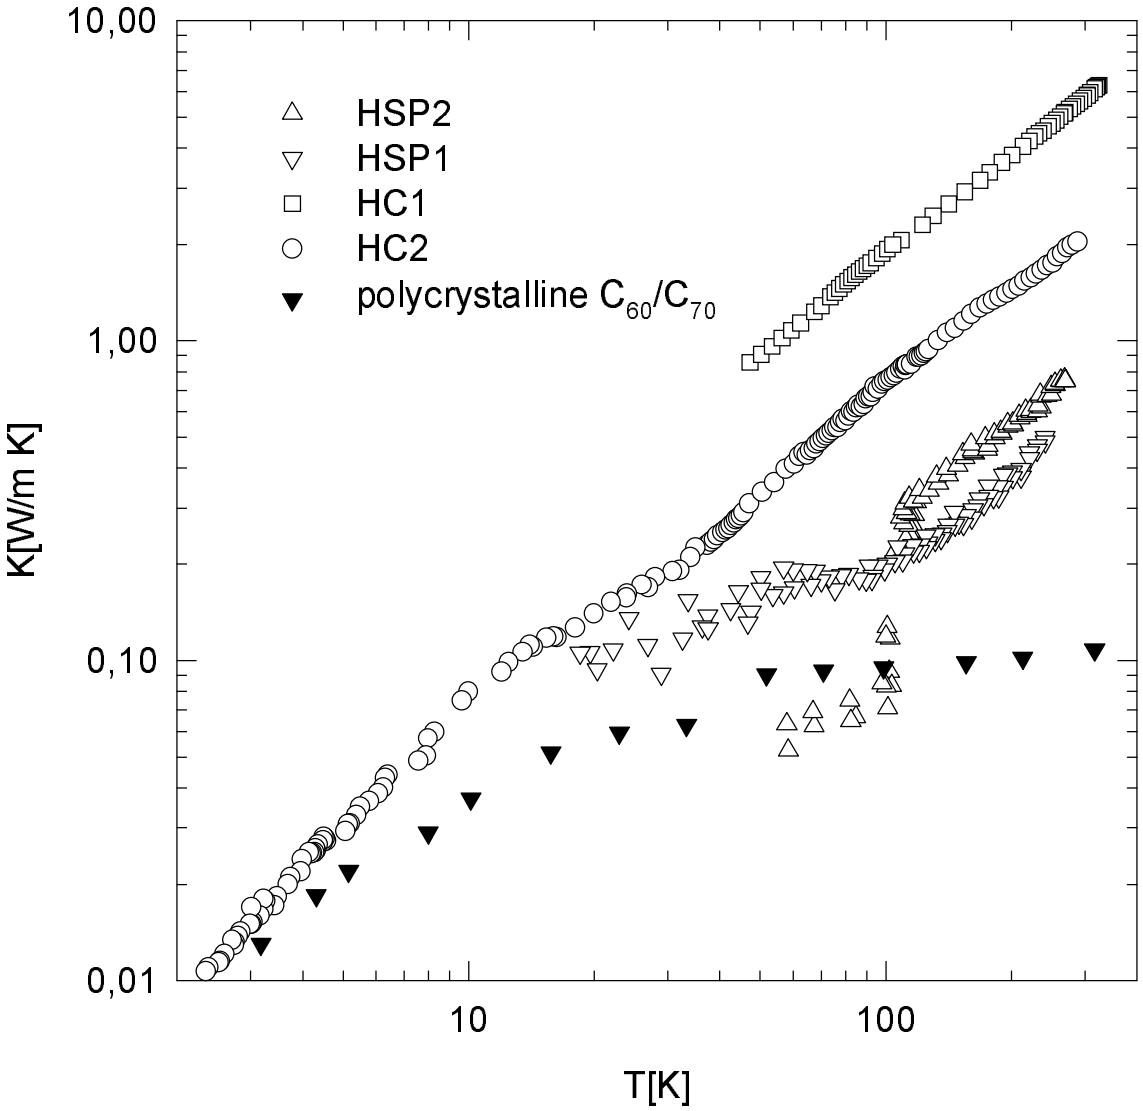
10,00
1,00
0,10
0,01
K[W/m K]
10
100
T[K]
HSP2
HSP1
HC1
HC2
polycrystalline C60/C70

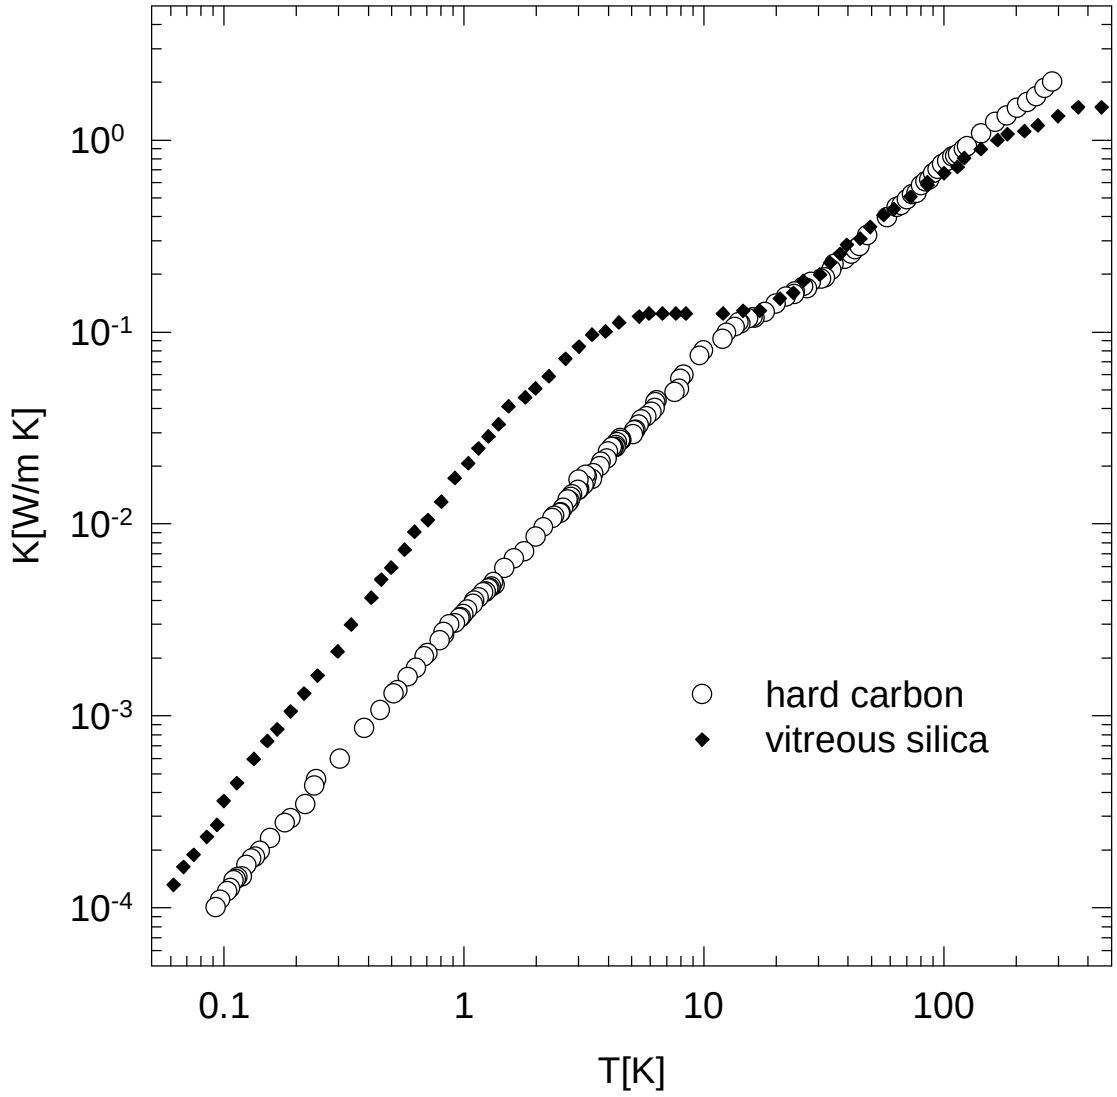
10^0
10^{-1}
10^{-2}
10^{-3}
10^{-4}
K[W/m K]
0.1
1
10
100
T[K]
hard carbon
vitreous silica

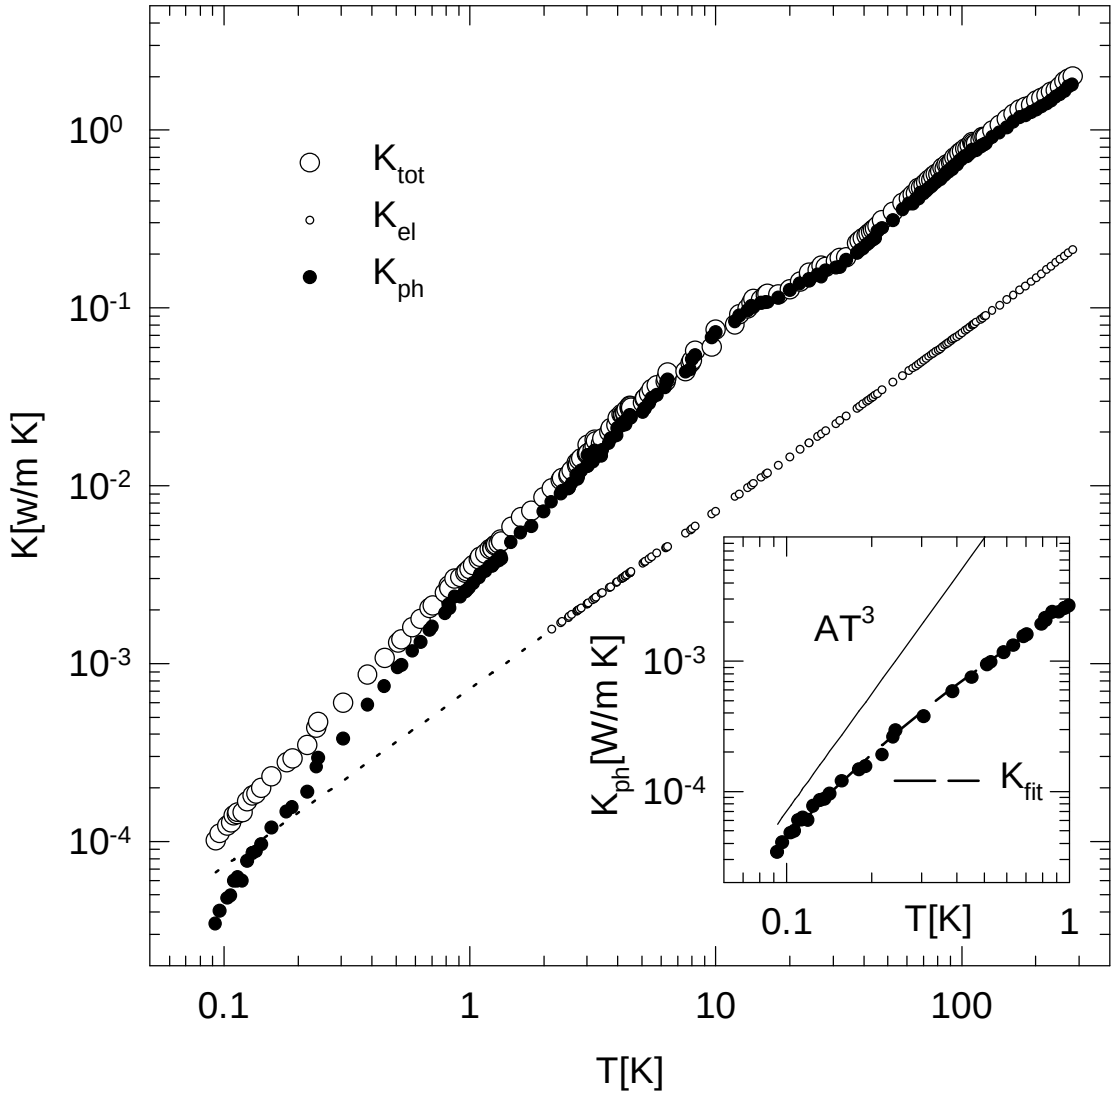
K[w/m K]
T[K]
K_{tot}
K_{el}
K_{ph}
10^0
10^{-1}
10^{-2}
10^{-3}
10^{-4}
0.1
1
10
100
K_{ph}[W/m K]
AT^3
K_{fit}
10^{-3}
10^{-4}
0.1
T[K]
1

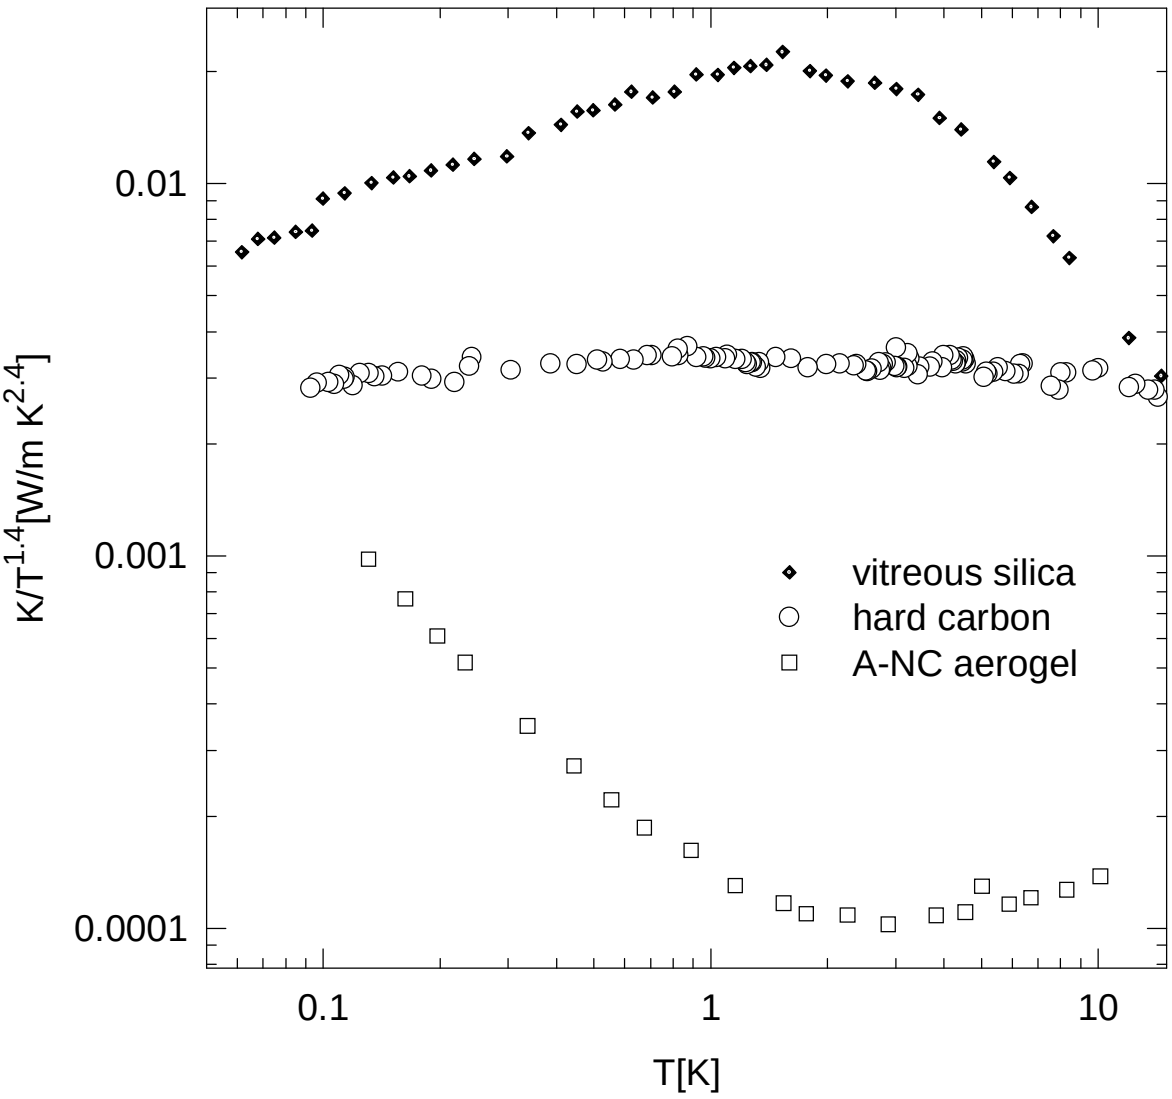
0.01
0.001
0.0001
0.1
1
10
T[K]
K/T^1.4[W/m K^2.4]
vitreous silica
hard carbon
A-NC aerogel